



Candlepower Distribution Curves

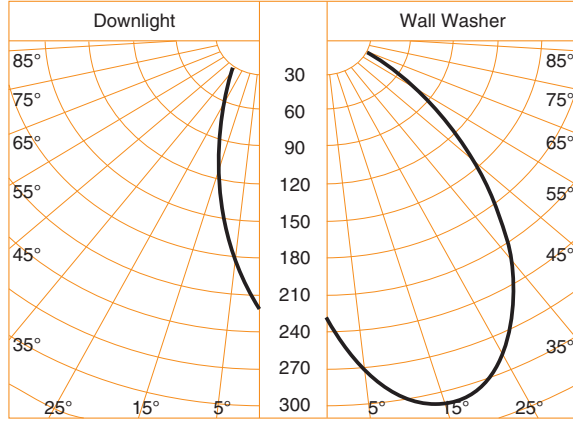

E7526FM 50W PAR-20 FL

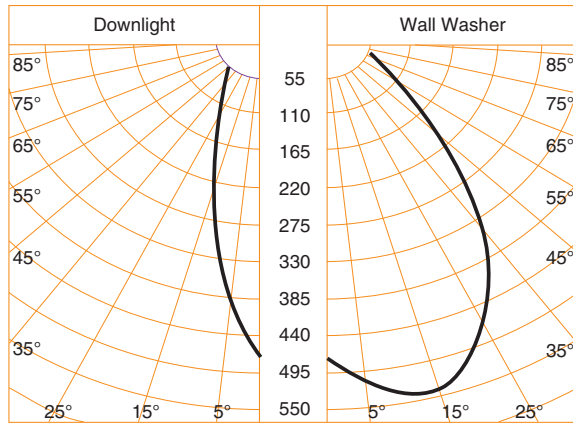

E7526FM 75W PAR-16 NFL

Notes

- 1 Data are cosine corrected to the plane of the wall. Uncorrected data are much higher and depend upon the angle of incidence to the wall which varies with the mounting distance from the wall.
- 2 Kurt Versen wall washers minimize hard shadow lines at the ceiling. Intensity increases gradually to just above eye level. The illuminated field is uniform and devoid of hot spots, striations and spikes.
- 3 Optional colors are on cones only. Kicker reflectors are clear Alzak for output and color rendition. Use multipliers for brightness and downlight data. Multiple units data are correct as shown.
- 4 Specular cone multipliers: Gold x .94, Wheat x .93, Pewter x .89, Mocha x .89, Graphite x .88, Titanium x .88, Bronze x .86, Black x .75.
- 5 Softglow® cone multipliers: Clear x .97, Gold x .88, Wheat x .88, Pewter x .81, Mocha x .79, Graphite x .76, Titanium x .75, Bronze x .72, Black x .65.

Multiple Units Footcandles

From Ceiling	2' from wall		3' from wall				4' from wall					
	2' Centers		3' Centers		3' Centers		4' Centers		4' Centers		6' Centers	
	CL	Mid	CL	Mid	CL	Mid	CL	Mid	CL	Mid	CL	Mid
1'	10	7	8	5	3	2	2	1	1	1	1	.3
2'	17	14	14	9	6	5	5	3	2	2	2	1
3'	16	15	12	9	7	6	6	4	3	3	3	2
4'	12	12	9	8	8	7	6	5	4	4	3	2
5'	9	9	6	6	7	6	5	4	4	4	3	2
6'	7	7	4	4	5	5	4	4	4	4	3	2
7'	5	5	3	3	4	4	3	3	4	3	3	2
8'	4	4	3	3	4	3	3	3	3	3	2	2
10'	2	2	2	2	2	2	2	2	2	2	2	2
12'	2	2	1	1	2	2	1	1	2	2	1	1

E7526FM 50W PAR-20 FL

From Ceiling	2' from wall		3' from wall				4' from wall					
	2' Centers		3' Centers		3' Centers		4' Centers		4' Centers		6' Centers	
	CL	Mid	CL	Mid	CL	Mid	CL	Mid	CL	Mid	CL	Mid
1'	20	16	17	10	6	5	5	3	2	1	2	1
2'	29	25	23	15	11	10	9	6	5	4	4	2
3'	26	24	19	15	13	11	11	8	7	6	5	3
4'	20	19	14	13	12	11	10	8	7	6	6	4
5'	15	15	10	10	11	10	8	7	7	6	5	4
6'	11	11	8	7	9	9	7	6	7	6	5	4
7'	9	8	6	6	7	7	6	5	6	5	4	4
8'	7	7	4	4	6	6	5	4	5	5	4	3
10'	4	4	3	3	4	4	3	3	4	4	3	2
12'	3	3	2	2	3	3	2	2	3	3	2	2

E7526FM 75W PAR-16 NFL

Brightness

Number	Lamps	85°	75°	65°	55°	45°
E7526FM	50W PAR-20 FL	2	8	12	834	2727
	75W PAR-16 NFL	4	14	21	1403	6247

Data in footlamberts. Photometer readings, Maximum Brightness Method.